




INSTALLATION INSTRUCTIONS

ORIGINAL EQUIPMENT REPLACEMENT

EXTERIOR SIDE/REARVIEW MIRRORS

NOTE: Most OE Mirrors use a common mount for installation on vehicles, consisting of a 3-bolt method. Plugs, adjustment cords, and wiring will differ according to each vehicle's equipment options. *Please consult vehicle Owner's Manual for exact removal and installation instructions.*

- 1) **Remove interior door panel and all associated panels, inserts, and screws needed to expose mounting screws.**
(Refer to Vehicle Owner's Manual for detailed instructions).
- 2) **Unplug/disconnect all plugs, adjustment cords and/or wiring from mirror to be replaced.**
(See Vehicle Owner's Manual for correct disconnect procedure).
- 3) **Remove bottom mounting screws, Support mirror with one hand while removing top screw to prevent mirror from falling, which may result in damage to the mirror.**
- 4) **Remove mirror from vehicle.**
- 5) **Remove mount screws from replacement mirror, and insert all plugs, adjustment cords and/or wiring through center hole on vehicle mounting plate.**
- 6) **Insert mounting screws on mirror through corresponding holes on vehicle mounting plate and hand tighten bolts on mounting screws. Once mirror is positioned correctly, tighten bolts completely.**
- 7) **Reinstall interior door panel and all associated panels, inserts, and screws.**
(Refer to Vehicle Owner's Manual for detailed instructions).

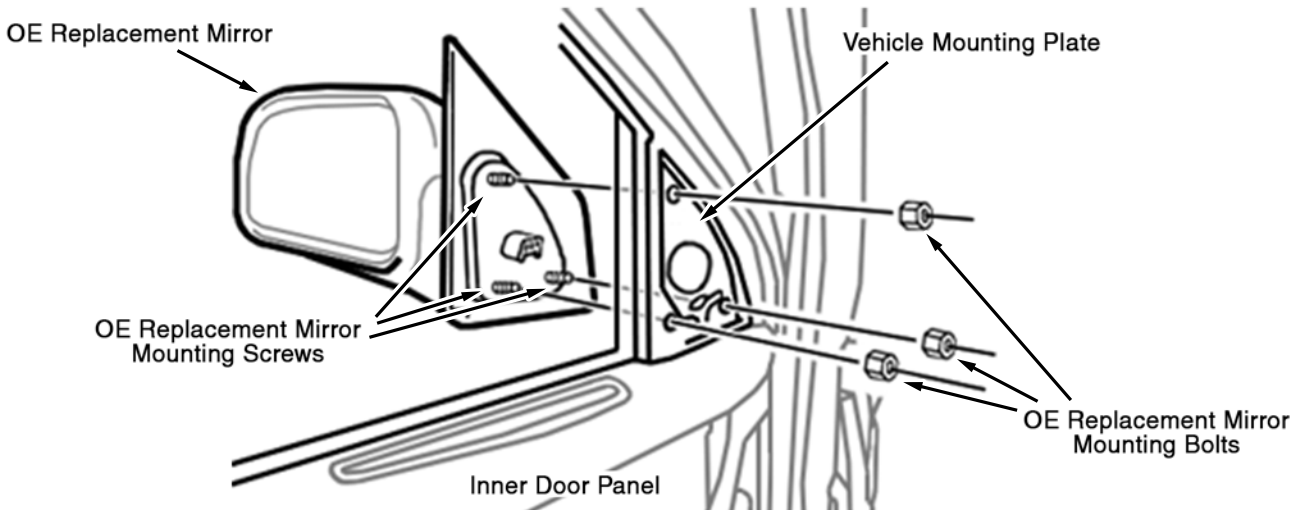

CIPA-USA, Inc. will not be responsible for damage to mirror, door, or any vehicle parts, components, or equipment due to improper removal or installation of OE Replacement mirrors. It is highly suggested to have a professional installer perform the installation.